arXiv:1206.1870v1 [quant-ph] 8 Jun 2012

Exploring Macroscopic Entanglement with a Single Photon and Coherent States

Pavel Sekatski,[1] Nicolas Sangouard,[1] Magdalena Stobińska,[2] Félix Bussières,[1] Mikael Afzelius,[1] and Nicolas Gisin[1]
[1] *Group of Applied Physics, University of Geneva, CH-1211 Geneva 4, Switzerland*
[2] *Institute of Physics, Polish Academy of Sciences, Al. Lotników 32/46, 02-668 Warsaw, Poland*

(Dated: March 7, 2013)

Entanglement between macroscopically populated states can easily be created by combining a single photon and a bright coherent state on a beam-splitter. Motivated by the simplicity of this technique, we report on a method using displacement operations in the phase space and basic photon detections to reveal such an entanglement. We demonstrate through preliminary experimental results, that this eminently feasible approach provides an attractive way for exploring entanglement at various scales, ranging from one to a thousand photons. This offers an instructive viewpoint to gain insight into the reasons that make it hard to observe quantum features in our macroscopic world.

Introduction Why do we not easily observe entanglement between macroscopically populated (macro) systems? Decoherence is widely accepted as being responsible [1]. Loss or any other form of interactions with the surroundings more and more rapidly destroys the quantum features of physical systems as their size increases. Technologically demanding experiments, involving Rydberg atoms interacting with the electromagnetic field of a high-finess cavity [2] or superconducting devices cooled down to a few tens of mK [3], have strengthened this idea.

Measurement precision is likely another issue [4]. In a recent experiment [5], a phase covariant cloner has been used to produce tens thousand clones of a single photon belonging initially to an entangled pair. In the absence of loss, this leads to a micro-macro entangled state [6]. Nobody knows however, how the entanglement degrades with a lossy amplification [7]. This led to a lively debate [8] concerning the presence of entanglement in the experiment reported in Ref. [5]. What is known is that under moderate coarse grained measurements, the micro-macro entanglement resulting from a lossless amplification leads to a probability distribution of results that is very close to the one coming from a separable micro-macro state [9]. This suggests that even if a macro system could be perfectly isolated from its environment, its quantum nature would require very precise measurements to be observed.

Both for practical considerations and from a conceptual point of view, it is of great interest to look for ways as simple as possible to generate and measure macro entanglement, so that the effects of decoherence processes and the requirements on the measurements can all be studied together. In this letter, we focus on an approach based on linear optics only, where a single photon and a coherent state are combined on a mere beam-splitter. The resulting path-entangled state [10] allows one to easily explore entanglement over various photon number scales, spanning from the micro to the macro domain, by simply tuning the intensity of the laser producing the input coherent state. We show that the entanglement is more and more sensitive to phase fluctuations between the paths when it grows. However, it features surprising robustness against loss, making it well suited to travel over long distances and to be stored in atomic ensembles. We further present a simple and natural method relying on local displacement operations in the phase-space and basic photon detections to reveal this entanglement. Our analysis shows that the precision of the proposed measurement is connected to the limited ability to control the phase of the local oscillator that is used to perform the phase-space displacements. We also report on preliminary experimental results demonstrating that entanglement containing more than a thousand photons could be created and measured with currently available technologies.

Creating macro entanglement by combining a single photon with a bright coherent state on a beam-splitter A particularly simple way of generating entanglement is to use a beam-splitter. Consider a single photon sent through a 50:50 beam-splitter. It occupies the two output modes A and B with the same probability and creates a simple form of entanglement between spatial modes (path entanglement)

$$\frac{1}{\sqrt{2}}\left(|1\rangle_A|0\rangle_B - |0\rangle_A|1\rangle_B\right) \tag{1}$$

known as single-photon entanglement [11]. In fact, any product input state of the form $\rho_A \otimes |\beta\rangle\langle\beta|_B$, where $|\beta\rangle$ is a coherent state, leads to entanglement after the beam-splitter if and only if ρ_A is nonclassical [12, 13], i.e. it cannot be written as a mixture of coherent states [14]. Thus, a mere beam-splitter links two fundamental concepts of quantum physics: non-classicality and entanglement. It also provides an attractive way for bringing entanglement to macroscopic level, as explained below.

Let us focus on the case where the beam-splitter inputs are a single photon $|1\rangle$ and a coherent state with $2|\alpha|^2$

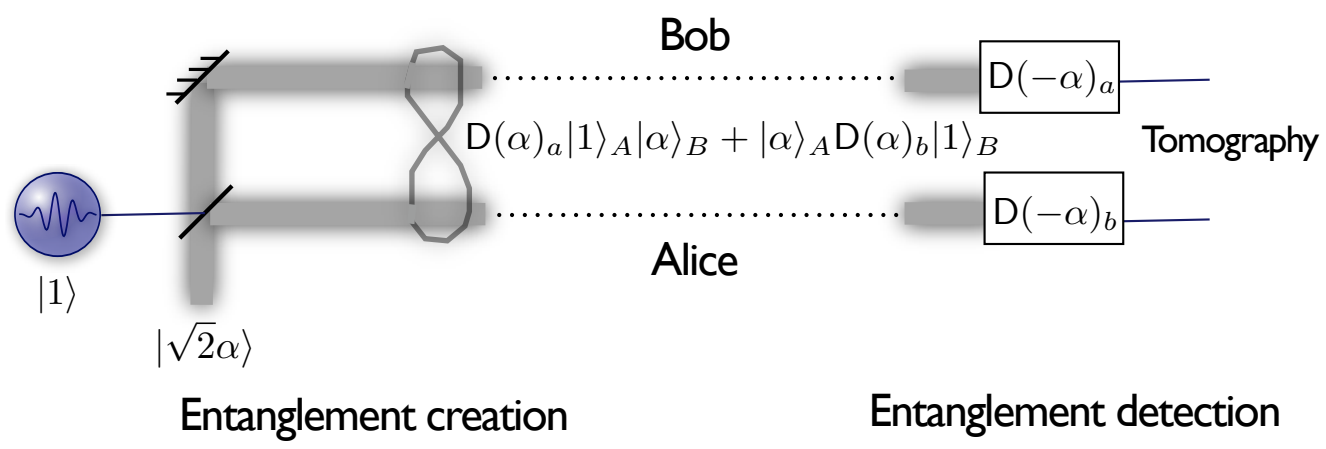

FIG. 1: Creation and detection of macro entanglement by combining a single photon Fock state $|1\rangle$ and a coherent state $|\sqrt{2}\alpha\rangle$ on a 50:50 beam-splitter.

photons on average (see Fig. 1)

$$|\psi_{\text{in}}\rangle = a^\dagger|0\rangle_A \otimes \mathsf{D}_b(\sqrt{2}\alpha)|0\rangle_B. \tag{2}$$

$\mathsf{D}_b(\sqrt{2}\alpha) = e^{\sqrt{2}(\alpha b^\dagger - \alpha^\star b)}$ is the displacement operator generating a coherent state $|\sqrt{2}\alpha\rangle$ from vacuum (in mode B), a and b are bosonic annihilation operators associated with modes A and B, respectively. A 50:50 beam-splitter transforms (a,b) into $((a-b)\sqrt{2},(a+b)/\sqrt{2})$. Since a and b commute, the output state reads

$$|\psi_{\text{out}}\rangle = \frac{1}{\sqrt{2}}\big(\mathsf{D}_a(\alpha)|1\rangle_A|\alpha\rangle_B - |\alpha\rangle_A\mathsf{D}_b(\alpha)|1\rangle_B\big). \tag{3}$$

The structure of this state is very simple and follows from displacement of the single-photon entanglement. Nevertheless, it possesses intriguing properties. It corresponds to a non-Gaussian state which describes the entanglement of two modes, each being individually a mixture of classical and quantum states. The average number of photons $2|\alpha|^2+1$ can be easily adjusted, by varying the amplitude of the initial coherent state. This allows for the exploration of entanglement at various scales ranging from a single photon to macroscopic photon number. Last but not least it is amazingly robust against loss, as we now show.

Robustness with respect to transmission loss. In general, entanglement is seen to be increasingly fragile to transmission loss as its size increases. The coherent state entanglement $|\alpha\rangle_A|\alpha\rangle_B + |-\alpha\rangle_A|-\alpha\rangle_B$ [15] provides a good example. If the mode B is subjected to loss (modeled by a beam-splitter with transmission coefficient η_t) the amount of entanglement, measured by the negativity (see [16, 17] for definition), decreases exponentially $\mathcal{N} = \frac{1}{2}e^{-2(1-\eta_t)|\alpha|^2}$ with the size $|\alpha|^2$ and loss $1-\eta_t$ [18]. In comparison, the state (3) exhibits a surprising robustness. Under the assumption that the mode B undergoes loss, $|\psi_{\text{out}}\rangle$ becomes a statistical mixture of $\frac{1}{\sqrt{1+\eta_t}}\mathsf{D}_a(\alpha)\mathsf{D}_b(\sqrt{\eta_t}\alpha)\big(|1\rangle_A|0\rangle_B - \sqrt{\eta_t}|0\rangle_A|1\rangle_B\big)$ and $\mathsf{D}_a(\alpha)\mathsf{D}_b(\sqrt{\eta_t}\alpha)|0\rangle_A|0\rangle_B$ with weights $\frac{1+\eta_t}{2}$ and $\frac{1-\eta_t}{2}$, respectively. After applying local displacements $\mathsf{D}_a(-\alpha)$ and $\mathsf{D}_b(-\sqrt{\eta_t}\alpha)$ to modes A and B, one finds that the negativity of the resulting state is given by $\mathcal{N} = \frac{\eta_t}{2}$. Since the entanglement cannot increase through local operations, this provides a lower bound for the entanglement before the displacements, i.e. between the macroscopically populated modes. Therefore, the amount of entanglement in $|\psi_{\text{out}}\rangle$ decays (at worst) linearly with loss, independently of its size. This robustness may be understood in the light of the intimate link between non-classicality and entanglement at a beam-splitter, as mentioned before. Indeed, loss, that is modeled by a beam-splitter, can be seen as an interaction process that entangles the non-classical states and the environment. However, the displacement is a classical operation that does not promote the entanglement of a given quantum system with its environment when it is amplified ($\mathsf{D}_b(\alpha) \rightarrow \mathsf{D}_b(\sqrt{\eta}\alpha)\mathsf{D}_E(\sqrt{1-\eta}\alpha)$). The robustness of the state (3) makes it well suited for storage in atomic medium, for example. Entanglement between two ensembles containing each a macroscopic number of atoms, has been successfully created by mapping a single-photon entanglement into two atomic ensembles [19, 20]. The storage of the displaced single-photon entanglement $|\psi_{\text{out}}\rangle$ would lead to a similar entanglement in terms of the number of ebits, but it would contain a macroscopic number of excited atoms.

Robustness with respect to coupling inefficiency. The starting point in our scheme is the creation of a single photon. It is thus natural to ask how the resulting macro entanglement degrades when the single photon is subjected to loss (i.e. loss before the 50:50 beam-splitter). For comparison consider for example, micro-macro entanglement obtained by amplifying one photon of an entangled pair [6] with an optimal universal cloner [21]. Such entanglement can be revealed even if the amplification is followed by arbitrarily large loss [22]. Nonetheless, the state becomes separable as soon as the overall coupling efficiency η_c before the cloner is lower than $\frac{n}{n+1}$, n being the average number of photons in the macro component [22]. On the other hand, one can show following the lines presented in the previous paragraph, that the negativity of the displaced single-photon entanglement scales like $\mathcal{N} = -\frac{1}{2}\big(1-\eta_c-\sqrt{1-2(1-\eta_c)\eta_c}\big) \approx \frac{\eta_c^2}{4} + \mathcal{O}(\eta_c^3) \geq 0$ where η_c stands for the coupling efficiency of the input single photon. The robustness with respect to the coupling inefficiency confers to the proposed scheme a great practical advantage over the one based on the universal cloner.

Robustness with respect to phase instabilities. Another decoherence process for path entanglement is associated with the relative phase fluctuations, due to e.g. vibrations and thermal fluctuations. If the two optical paths corresponding to A and B acquire a phase difference φ, the displaced single-photon entanglement becomes $|\psi^{\varphi}_{\text{out}}\rangle = \frac{1}{\sqrt{2}}\big(\mathsf{D}_a(\alpha e^{i\varphi})e^{i\varphi}|1\rangle_A|\alpha\rangle_B - |e^{i\varphi}\alpha\rangle_A\mathsf{D}_b(\alpha)|1\rangle_B\big)$. Furthermore, if φ varies from trial to trial, the state $|\psi^{\varphi}_{\text{out}}\rangle\langle\psi^{\varphi}_{\text{out}}|$ has to be averaged over φ with the probability distribution $p(\varphi)$ associated to the phase noise. The question of the sensibility of the displaced single-photon entanglement with respect to phase instability thus reduces to a measure of the entanglement contained in $\bar{\rho}_{\text{out}} = \int d\varphi\, p(\varphi)|\psi^{\varphi}_{\text{out}}\rangle\langle\psi^{\varphi}_{\text{out}}|$. The negativity of this state can easily be obtained numerically by projecting $\bar{\rho}_{\text{out}}$ into a finite dimensional Hilbert space (see solid lines in Fig. 2 for a Gaussian probability distribution $p(\varphi)$ with variance $\delta\varphi$). To derive an analytical lower bound on the negativity of this state, we first notice that for any density matrix ρ and any vector $|v\rangle$ the following inequality holds $\langle v|\rho^{\Gamma}|v\rangle \geq \lambda_{min} \geq -\mathcal{N}_{\rho}$, where Γ denotes partial transposition and λ_{min} is the smallest eigenvalue of ρ^{Γ}. For the state (3), where $p(\varphi) = \delta(0)$, it is easy to verify that the vector $|v\rangle$ saturating the inequality is $\frac{1}{\sqrt{2}}\mathsf{D}_a(\alpha)\mathsf{D}_b(\alpha)(|0\rangle|0\rangle - |1\rangle|1\rangle)$. For a general $\bar{\rho}_{\text{out}}$, it is not optimal, however it provides a lower bound for the estimation of $\mathcal{N}$. We find $\mathcal{N}_{\bar{\rho}_{\text{out}}}(\delta\varphi, |\alpha|^2) \geq \int d\varphi p(\varphi)\frac{e^{-2\alpha^2(2-\cos\varphi)}}{2}\left(\alpha^2(1-\cos(2\varphi)) - \cos\varphi\right)$ (the dashed lines in Fig. 2 is obtained by performing the integral numerically for a Gaussian probability distribution). For a Gaussian probability distribution $p(\varphi)$ with variance $\delta\varphi$, the lower bound can be approximated by $\frac{2-\delta\varphi}{4(1+2|\alpha|^2\delta\varphi)^{\frac{3}{2}}}$ (see dot-dashed lines in Fig. 2) [23]. Fig. 2 reveals what is expected from a macroscopic quantum state: the larger the size $2|\alpha|^2+1$ of the state is, the more it becomes sensitive to phase noise.

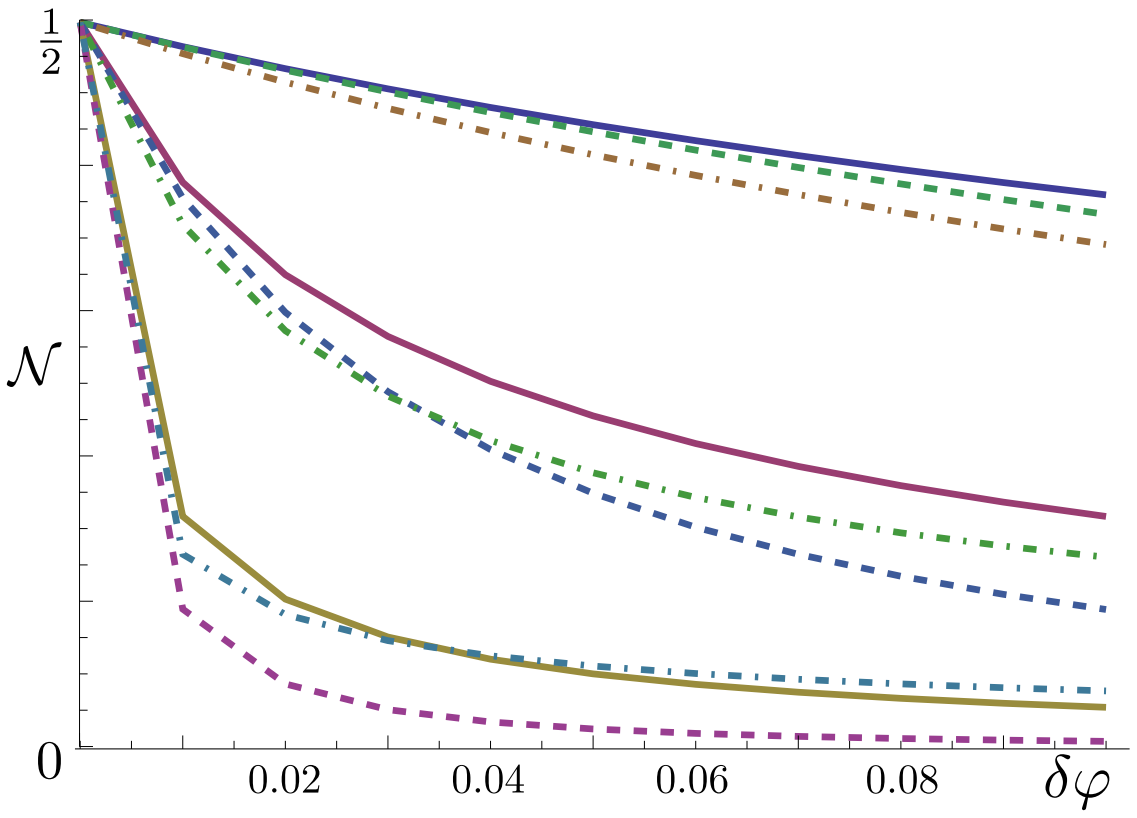

FIG. 2: Behavior of the negativity of the state $\bar{\rho}_{\text{out}}$ as the function of the phase noise variance (rad) for various $|\alpha|^2 = \{1, 10, 100\}$ (from top to bottom). The full line is the numerical calculation, the dashed line is a semi-analytical bound, and the dot-dashed line is a fully analytical. (See the main text for details.)

Revealing displaced single-photon entanglement. So far, we have discussed the properties of the displaced single-photon entanglement. We now present a simple way to reveal it. The basic idea is to displace each of the electromagnetic fields describing the modes A and B by $-\alpha$. Such a displacement in the phase space can be easily performed by mixing the mode to be displaced with an auxiliary strong coherent field (labelled as the local oscillator in the following) on a highly unbalanced beam-splitter [25], in a manner similar to homodyne measurements. Since $\mathsf{D}_a(-\alpha) = \mathsf{D}_a(\alpha)^{-1}$, the modes A and B ideally end up in the state (1), which can be revealed by tomography using single photon detectors.

In particular, the approach developed in Ref. [26] does not require a full tomography after the local displacements. It gives a lower bound on the entanglement between the modes A and B from the estimation of the entanglement contained in the two-qubit subspace $\{|00\rangle, |01\rangle, |11\rangle, |10\rangle.\}$. More precisely, the concurrence C of the detected fields is bounded by $C \geq \max\{0, V(p_{01}+p_{10}) - 2\sqrt{p_{00}p_{11}}\}$ [26], where V is the visibility of the interference obtained by recombining the modes A and B on a 50:50 beam-splitter, and the coefficients p_{mn} are the probabilities of detecting m photons in A and n in B. This tomographic approach for characterizing single-photon entanglement is attractive in practice and already triggered highly successful experiments, demonstrating e.g. heralded entanglement between atomic ensembles [19, 20, 26–28].

Note that the statistical fluctuations in the phase of local oscillators that are used to perform the displacements, limit the precision of the measurement process. Under the assumption that the two local displacements $\mathsf{D}_a(-\alpha), \mathsf{D}_b(-\alpha)$ are performed with a common local oscillator, the measured state is of the form $\int d\bar{\varphi}\bar{p}(\bar{\varphi})\mathsf{D}_a(-\alpha e^{i\bar{\varphi}})\mathsf{D}_b(-\alpha e^{i\bar{\varphi}})\rho_{\text{out}}\mathsf{D}^{\dagger}_a(-\alpha e^{i\bar{\varphi}})\mathsf{D}^{\dagger}_b(-\alpha e^{i\bar{\varphi}})$ where $\bar{p}(\bar{\varphi})$ stands for the phase noise distribution and $\rho_{\text{out}} = |\psi_{\text{out}}\rangle\langle\psi_{\text{out}}|$. Let $\bar{V}$ be the visibility of the interference that characterizes the phase stability of the local oscillator. One can show that for small imperfections $\epsilon = (1-\bar{V}) \ll 1$, the concurrence is bounded by $C \geq \max\{0, 1 - 10(1-\bar{V})|\alpha|^2\}$. The necessary precision of the measurement thus scales as $\frac{1}{\epsilon} = \frac{1}{10|\alpha|^2}$. This result strengthens the idea that precise measurements are generally essential for revealing quantum properties of macro systems.

Proposed experiment We now address the question of the experimental feasibility in detail. For concreteness, we focus on a realization of the single photon source from a pair source based on spontaneous parametric down conversion, the detection of one photon heralding the production of its twin. Filtering techniques must be used so that the spectrum of the heralded photon can be made indistinguishable from the one of a coherent state produced by a laser. Let η_c be the coupling efficiency of the single photon, η_t be the global detection efficiency, including the transmission from the 50:50 beam-splitter to the detector, as before. For small heralding efficiency and if the parametric process is weakly pumped so that the success probability for the emission of one photon pair is small, one can show that the concurrence is bounded by $C \geq \max\{0, \eta - 2\sqrt{2\eta(1-\eta)}\sqrt{\epsilon\eta_t|\alpha|^2} - 2(2+3\eta)\epsilon\eta_t|\alpha|^2\}$. Here $\eta = \eta_c\eta_t$ and $\epsilon = 1 - V$ where V is the interferometric visibility that characterizes the phase stability of A, B and the local oscillator (we assume that the modes have independent phase fluctuations with the same variance). To know the value of the visibility that can be obtained in practice, we built a balanced Mach-Zehnder interferometer (See Fig. 3). Using an active stabilization (see supplemental material), we have obtained a visibility of $V = 99.996 \pm 0.001\%$. Assuming a coupling efficiency $\eta_c = 50\%$ and a detection efficiency $\eta_t = 60\%$, the concurrence remains positive ($C \approx 0.01$) for $|\alpha| = 28$. This translates into entanglement populated by more than $(2|\alpha|^2 + 1) = 1500$ photons.

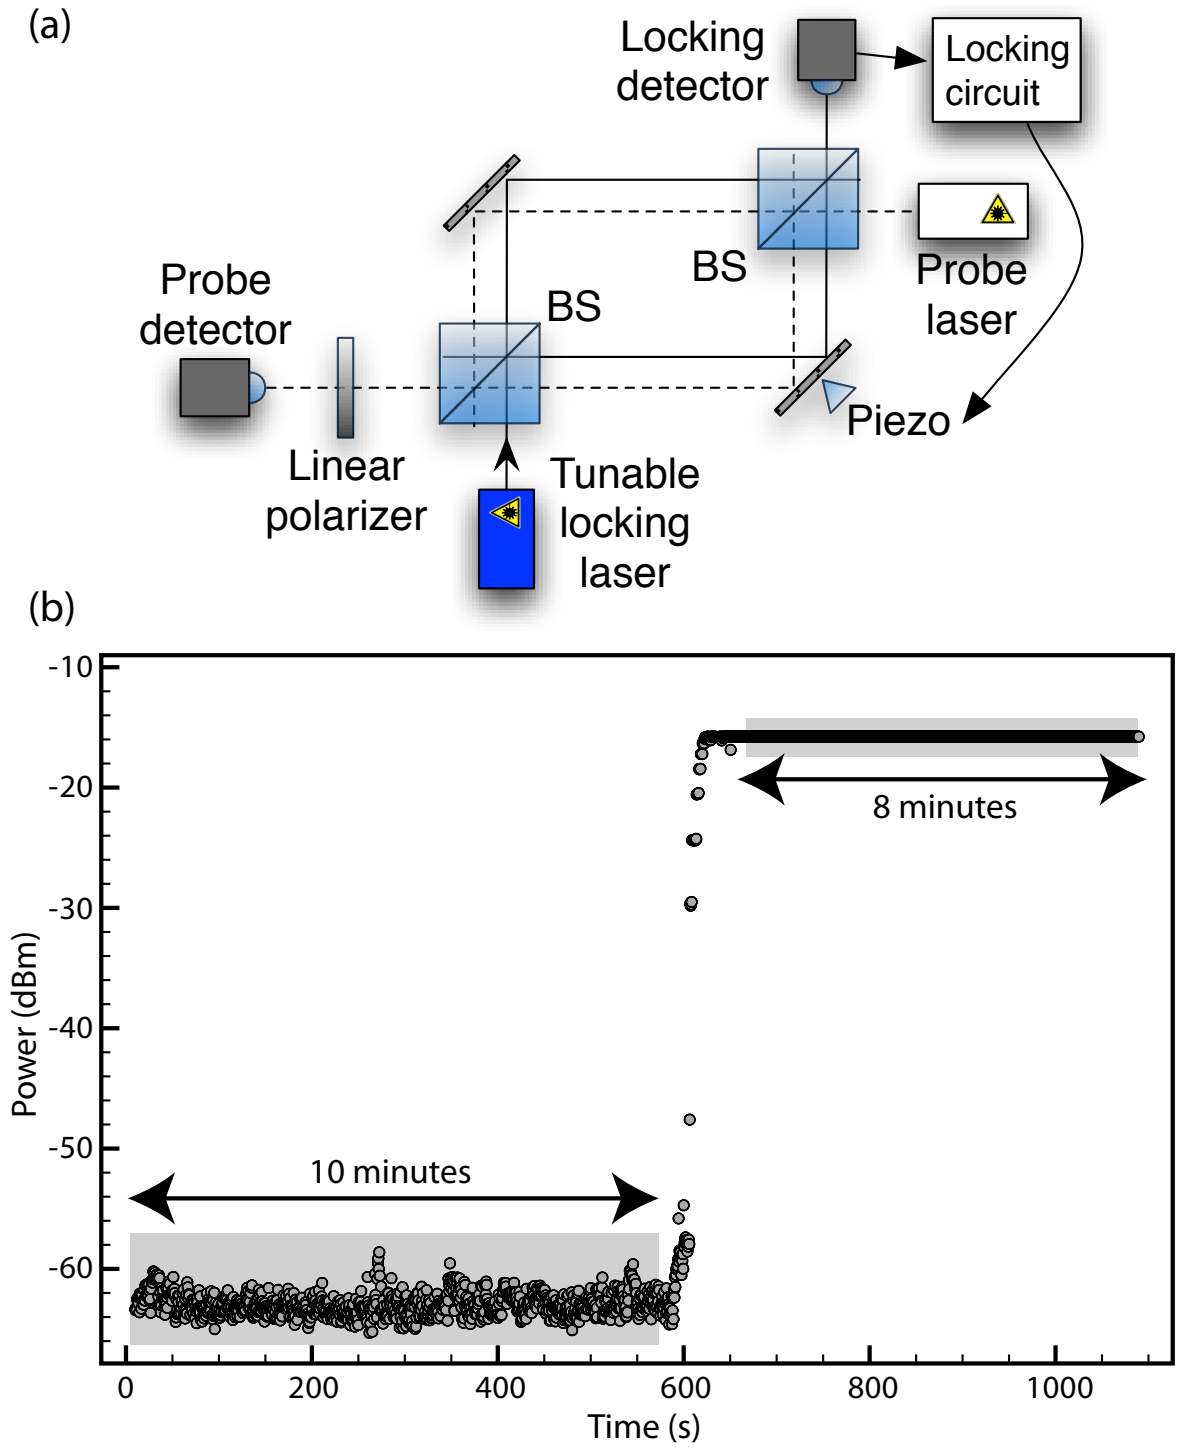

FIG. 3: (a) Setup to measure the interference visibility. A balanced Mach-Zehnder interferometer made with two 50/50 beam-splitters (BS) is locked using a tunable "locking laser". The locking detector's signal is feed into a locking circuit driving a piezo controlling the length of one of the arms. By tuning its wavelength, the phase of the interferometer can be tuned continuously. The quality of the interference can be probed using a "probe laser" whose wavelength is fixed. (b) Measured power (in dBm) at the "probe detector" as function of time. The interferometer's phase was first locked to yield destructive interference for the probe laser for 10 minutes, and then was locked to constructive interference for 8 minutes. The measured interference visibility is $99.996 \pm 0.001\%$.

Conclusion We have presented a scheme for creating and revealing macroscopic entanglement with a single photon, coherent states and linear optical elements. The simplicity of our proposal is conceptually remarkable but it naturally raises the question: is the resulting state macroscopic? We have shown through experimental results that the entangled state that could be obtained with currently available technologies would involve a large enough number of photons to be seen with the naked eyes [29]. This makes our approach satisfactory if macroscopicness is a notion related to the size. Although our study showed that the resulting state features an unexpected robustness against loss, we have shown that it is also more and more fragile under phase disturbance when its size increases. Our approach is thus also satisfactory if macroscopic means sensitive to decoherence and highlights the complexity of possible interactions between a given quantum system and its surroundings. We have also seen that the precision of the measurement that is required to reveal the quantum nature of the produced state increases with its size. This also makes our scheme satisfactory if macroscopicness is related to the requirement on the measurement precision. Note finally, that in opposition to bright two-mode squeezed states, the present entanglement has one ebit, independently of its size. Are squeezed states more macroscopic? What we know is that such entanglement can be detected from quadrature measurements using the Duan criterium, as nicely illustrated for example, in Ref. [30]. On the one hand, both the state and the Duan criterium are in principle robust against loss. On the other hand, squeezing is known to be very hard to measure with lossy setups. Comparing in detail the necessary resolution of quadrature measurements with our example is work for future.

We thank C. Fabre, J. Laurat, M. Mitchell, O. Morin, H. de Riedmatten, R. Thew, H. Zbinden for helpful comments, and we acknowledge the Swiss NFS and the EU project Qessence for financial support. M.S. was supported by MNiSW grant No. 2619/B/H03/2010/38.

appendix We describe here how the interference visibility V of the balanced Mach-Zehnder interferometer shown on Fig. 3 was measured. As explained in the main text, this visibility directly affects the concurrence C of the macroscopic entangled state that we could experimentally measure with the setup of Fig. 1 through the relation $C \geq \max\{0, \eta - 2\sqrt{2\eta(1-\eta)}\sqrt{\epsilon\eta_t|\alpha|^2} - 2(2 - 3\eta)\epsilon\eta_t|\alpha|^2\}$, where $\epsilon = 1 - V$. Determining how close can V be to the ideal value of 1 thus allows us to estimate how many photons the entangled state could contain (i.e. $2|\alpha|^2 + 1$) for given a value of the measured concurrence C. Obviously, $|\alpha|^2$ increases with V.

The balanced Mach-Zehnder interferometer that we built (see Fig. 3a of the main text) allows to determine how stable could be the relative phase between modes A and B of the setup of Fig. 1, as well as between mode A (or B) and the local oscillator that is used to realize the displacement operation (as part of the measurement on the entangled state). The interferometer is built with bulk optics components. One arm contains a mirror that can be moved on sub-wavelength scale using a piezo actuator. The interferometer's phase is probed using an external cavity laser diode (the *locking laser*), and it is locked to the side of an interference fringe with a feedback signal on the piezo. The locking laser is widely tunable around 1560 nm. Thus, by slowly tuning its wavelength while the locking circuit is activated, we can continuously tune the phase of the interferometer with a large precision. The quality of the interference can be probed using another laser (the *probe laser*) whose wavelength is fixed at 1560 nm and that propagates into different optical modes to avoid an overlap with the locking laser's beam. On Fig. 3b, we see the optical power $P_{\min}$ (in dBm) leaking through the interferometer when the phase is set to yield destructive interference for the probe laser. The system is locked to this minimum and is kept at this point for 10 minutes. After this, the wavelength of the locking laser is tuned to yield constructive interference with power $P_{\max}$ for 8 minutes. The extinction ratio is $P_{\max} - P_{\min} = 47.2$ dB, corresponding to a visibility of $99.996 \pm 0.001\%$. To obtain this near-perfect visibility, the path imbalance of the interferometer was reduced to less than 200 μm to mitigate the effect of non-zero spectral width of the probe laser ($\approx$ 1 GHz). Also, both modes of the interferometer are polarized before being coupled into a single-mode optical fiber (to implement spatial mode filtering). The maximum limit on the measured visibility is potentially due to a combination of imperfect mode-matching, unequal loss from both arms, acoustic vibrations and electrical noise in the feedback signal.

Given this measured value of V, and assuming $C = 0.01$, $\eta_c = 50\%$ and $\eta_t = 60\%$, we find $2|\alpha|^2 + 1 \approx 1500$ photons. Hence, macroscopic entanglement with a thousand photons is within experimental reach with our approach, and states with 10^5 photons are foreseeable. This would require, in particular, the spectral width of the local oscillator to be stabilized to within 100 MHz or less (which is easily feasible with a locked laser diode), and to control the relative loss in both arms to within 10^{-3}.

---

[1] W. H. Zurek, Rev. Mod. Phys. **75**, 715 (2003).

[2] M. Brune *et al.*, Phys. Rev. Lett. **77**, 4887 (1996).

[3] J.R. Friedman *et al.*, Nature **406**, 43 (2000).

[4] N.D. Mermin, Phys. Rev. D **22**, 356 (1980).

[5] F. De Martini *et al.*, Phys. Rev. Lett. **100**, 253601 (2008).

[6] F. De Martini, V. Mussi, and F. Bovino, Opt. Commun. **179**, 581 (2000); C. Simon, G. Weihs, and A. Zeilinger, Phys. Rev. Lett. **84**, 2993 (2000).

[7] In the presence of loss before and after the phase covariant cloner, we do not know when the amplified state becomes separable.

[8] F. De Martini and F. Sciarrino, arXiv:1202.5518 and references therein.

[9] S. Raeisi, P. Sekatski, and C. Simon, Phys. Rev. Lett **107**, 250401 (2011).

[10] A. Windhager *et al.*, Opt. Comm. **284**, 1907 (2011).

[11] S.J. van Enk, Phys. Rev. A **72**, 064306 (2005).

[12] J.K. Asboth, J. Calsamiglia, H. Ritsch, Phys. Rev. Lett. **94**, 173602 (2005).

[13] J. Solomon Ivan, N. Mukunda, and R. Simon, arxiv:0603255.

[14] R.J. Glauber, Phys. Rev. **131**, 2766 (1963).

[15] B.C. Sanders, Phys. Rev. A **45**, 6811 (1992)

[16] Negativity $\mathcal{N}$ [17] conveniently quantifies entanglement. It is defined by $\mathcal{N} = \sum_{\lambda<0} |\lambda|$, where λ are the eigenvalues of the partially transposed density matrix. Accordingly to this definition the negativity of a two qubits states if bounded by 1/2.

[17] R. Horodecki, P. Horodecki, M. Horodecki, and K. Horodecki, Rev. Mod. Phys. **81**, 865 (2009).

[18] Consider transmission efficiency η such that $\eta|\alpha|^2 \gg 1$. Further consider that the mode B undergoes loss. The coherent state entanglement becomes $|\alpha\rangle_a|\eta\alpha\rangle_b|\sqrt{1-\eta}\alpha\rangle_\ell + |-\alpha\rangle_a|-\eta\alpha\rangle_b|-\sqrt{1-\eta}\alpha\rangle_\ell$ where ℓ stands for the lost mode. Tracing ℓ out, one gets

$$\begin{aligned}\tfrac{1}{2}\Big(& |\alpha\rangle_a|\sqrt{\eta}\alpha\rangle_b\langle\alpha|_a\langle\sqrt{\eta}\alpha|_b| \\ & +|-\alpha\rangle_a|-\sqrt{\eta}\alpha\rangle_b\langle-\alpha|_a\langle-\sqrt{\eta}\alpha|_b \\ & -e^{-2(1-\eta)|\alpha|^2}|\alpha\rangle_a|\sqrt{\eta}\alpha\rangle_b\langle-\alpha|_a\langle-\sqrt{\eta}\alpha|_b \\ & -e^{-2(1-\eta)|\alpha|^2}|-\alpha\rangle_a|-\sqrt{\eta}\alpha\rangle_b\langle\alpha|_a\langle\sqrt{\eta}\alpha|_b\Big).\end{aligned}$$

The smallest eigenvalue associated to its partial transpose is $-e^{-2(1-\eta)|\alpha|^2}$.

[19] K.S. Choi *et al.*, Nature (London) **452**, 67 (2008).

[20] I. Usmani *et al.*, Nature Photon. **6**, 234 (2012).

[21] A. Lamas-Linares, C. Simon, J.C. Howell, and D. Bouwmeester, Science **296**, 712 (2002).

[22] P. Sekatski, B. Sanguinetti, E. Pomarico, N. Gisin, and C. Simon, Phys. Rev. A **82**, 053814 (2010).

[23] In practice, the phase stability is usually characterized by the classical interferometric visibility $\bar{V}$ that would be obtained by recombining the mode A and B on a 50:50 beam-splitter [24]. Using the relation between the visibility and the phase fluctuation $V = e^{\frac{-\delta\varphi}{2}} \approx 1 - \frac{\delta\varphi}{2}$, we obtain $\mathcal{N}_{\bar{\rho}_{\text{out}}}(V, |\alpha|^2) \geq \frac{V}{2(1+4|\alpha|^2(1-V))^{\frac{3}{2}}}$.

[24] J. Minar, H. de Riedmatten, C. Simon, H. Zbinden, and N. Gisin, Phys. Rev. A **77**, 052325 (2008).

[25] Let $|\gamma\rangle$ and r be the local oscillator and the reflectivity of the beam-splitter used to perform one of the local displacements. In the limit $|\gamma| \to \infty$ and $r \to 0$ such that $\gamma r = Const = -\alpha$, any input state $\bar{\rho}$ evolves as $\mathsf{D}(-\alpha)\bar{\rho}\mathsf{D}^\dagger(-\alpha)$, that is, it is displaced in the phase space by $-\alpha$, see M.G.A. Paris, Phys. Lett. A **217**, 78 (1996) for a detailed proof. For small but non-zero reflectivity, γ can always be tuned to fulfill $\gamma r = -\alpha$, so that the corresponding operation simply corresponds to

a displacement $\mathsf{D}(-\alpha)$ followed by loss modeled with a beam-splitter with amplitude transmission r.

[26] C.W. Chou *et al.*, Nature (London) **438**, 828 (2005).

[27] J. Laurat *et al.*, Phys. Rev. Lett. **99**, 180504 (2007).

[28] K.C. Lee *et al.*, Science **334**, 1253 (2011).

[29] P. Sekatski *et al.*, Phys. Rev. Lett. **103**, 113601 (2009).

[30] A.S. Villar *et al.*, Phys. Rev. Lett. **95**, 243603 (2005).